

Enhanced Ocean Predictability Through Optimal Observing Strategies

A. D. Kirwan, Jr.
College of Marine Studies
University of Delaware
Robinson Hall
Newark, DE 19716
phone (302) 831-2977 fax (302) 831-6838 email adk@udel.edu

Michael S. Toner
College of Marine Studies
University of Delaware
Robinson Hall
Newark, DE 19716
phone (302) 831-1175 fax (302) 831-6838 email toner@newark.cms.udel.edu
Award Number: N00014-99-1-0054
<http://newark.cms.udel.edu/~brucel/hrd.html>

LONG-TERM GOALS

The long-term goal of this research is to develop the requisite technology to design effective observation strategies that will maximize the capacity to predict mesoscale and submesoscale conditions so as to provide the best possible nowcasts and forecasts of oceanic conditions.

OBJECTIVES

There are three tightly integrated objectives. The first is to focus both oceanographic and dynamical systems approaches on developing optimal observing strategies. The common thread linking both approaches is Lagrangian data, so this phase of the work addresses the question of how best to construct Eulerian current maps from these data and how to use the information contained therein to design optimal observing systems.

The second objective will be to design an optimal observing strategy from a synthetic database. Here we will use primitive equation model simulations as the control. The last objective will be to apply this technology to the Gulf of Mexico where both high resolution numerical model results and drifter data are available.

APPROACH

We approach the objectives in this effort by combining the oceanographic methodology of objective Eulerian current reconstruction initiated by Rao and Schwab (1981), Eremeev *et al.* (1992a and 1992b), and Cho *et al.* (1998) with dynamical systems techniques of invariant manifold calculations as presented in Poje and Haller (1999). Initially, we intend to utilize model flows where the Lagrangian mixing dynamics are known. Normal Mode Analysis (NMA) developed from prior ONR-supported research will be applied to flows so as to establish benchmark cases for testing observation.

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 30 SEP 1999		2. REPORT TYPE		3. DATES COVERED 00-00-1999 to 00-00-1999	
4. TITLE AND SUBTITLE Enhanced Ocean Predictability Through Optimal Observing Strategies				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of Delaware, College of Marine Studies, Newark, DE, 19716				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 5	19a. NAME OF RESPONSIBLE PERSON
a REPORT unclassified	b ABSTRACT unclassified	c THIS PAGE unclassified			


WORK COMPLETED

The emphasis during the first year was on the first objective. In pursuing this objective, a single layer, reduced gravity, double gyre primitive equation model was used to test the accuracy and sensitivity of time dependent Eulerian velocity fields reconstructed using NMA from numerically generated drifter trajectories and climatology. To isolate the accuracy and sensitivity aspects of the reconstruction from the influence of an irregular domain and open boundary, a square basin scale domain was used. The purpose was to determine how much Lagrangian data is needed to capture the Eulerian vector field within a specified accuracy.

The Eulerian fields were found by projecting, on an analytic set of divergence free basis functions (Normal Modes), drifter data launched in the active western half of the basin supplemented by climatology in the eastern domain. The time dependent coefficients were evaluated by least squares minimization and the reconstructed fields were compared to the original model output using measures localized in both physical and spectral space.


RESULTS

We found that the accuracy of the reconstructed fields depends critically on the spatial coverage of the drifter observations. For the eddy-resolving flow considered, the Normal Mode technique allowed accurate (5-15% error) Eulerian reconstructions in the energetic western basin from drifters representing less than 0.5% of the model grid points. Similar errors were obtained with an equivalent number of Eulerian observations. We concluded that with fixed monetary resources, relatively inexpensive drifter data provides comparable information as moored current meters.

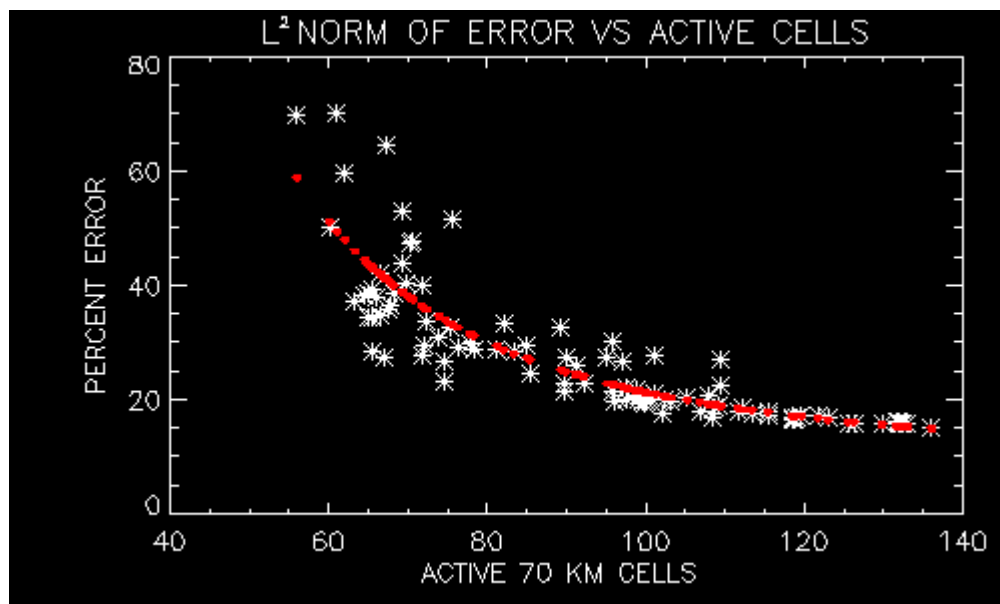

- 1. Error from projecting 180 drifters on 107 modes related to the mean number of active cells during the 50 day reconstruction period. The linear correlation between the ordinate and abscissa ^(-2.6) is 0.87.*

Accuracy of the reconstructed vector field depends significantly on the spatial coverage of the drifters. In lieu of computing the spatial decorrelation function of the model truth, we rely on the Rossby radius of deformation to delineate a homogeneous spatial decorrelation scale and introduce the concept of an “active” cell. For purposes of coverage, a cell is said to active if it contains at least one drifter. For the flow considered here, the size of the cell corresponds to two Rossby radii. Figure 1 shows the relation between reconstruction error (normalized kinetic energy of the difference field) and the mean number of active cells. Figure 2 shows reconstructions for a good coverage deployment and two poor coverage deployments. Data voids cause the structure of small-scale basis functions to appear in the reconstruction.

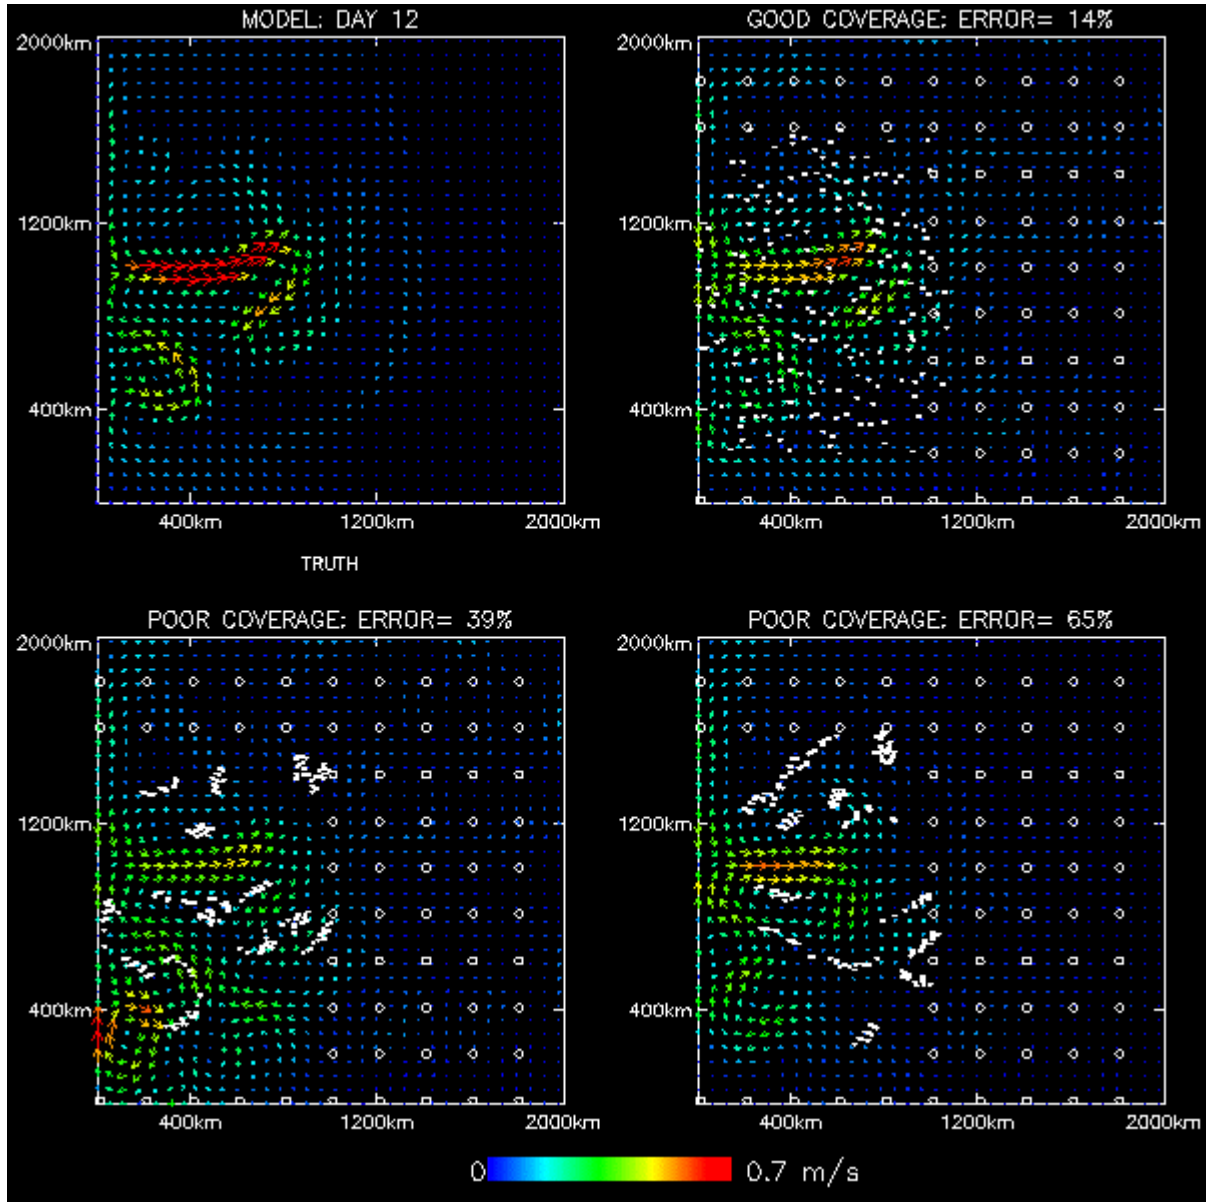

2. Reconstructed velocity fields for three different deployments, each of 180 drifters. Solid white dots locate the drifter positions and open circles locate the 65 climatology sample points.

IMPACT/APPLICATIONS

The immediate application of this technology will be to Rapid Environmental Assessment (REA). In addition to the traditional military interest in REA, civilian applications in environmental crisis management ranging from pollution monitoring and containment to risk assessment for hazardous waste operations, will increase substantially in the next few years.

Results obtained thus far are generic in that the spatial coverage and comparative quality issues of the Lagrangian data apply to open and arbitrarily shaped domains. Accuracy issues, of course, will differ in specifics depending on the knowledge available about the “true” flow.

TRANSITIONS

The methodology in this study will be used to assess the predictive capability of a high resolution Princeton Ocean Model (POM) of the Gulf of Mexico in a collaborative effort with Lakshmi Kantha at the University of Colorado. Additionally, this methodology was used in a Ph.D. dissertation by LCDR William Schultz titled, “Ocean Surface Maps from Blending Disparate Data through Normal Mode Analysis,” at Old Dominion University. In this effort, MODAS was used in combination with NMA to provide nowcasts of the Texas-Louisiana Shelf with drifter and mooring data.

RELATED PROJECTS

The nowcast technology is being utilized to investigate HF radar data, provided by Jeff Paduan at the Naval Postgraduate School, in Monterey, CA through another ONR project N00014-99-1-0052.

REFERENCES

- K. Cho, R. O. Reid, and W. D. Nowlin, Jr., 1998. Objectively mapped stream functions fields on the Texas-Louisiana shelf based on 32 months of moored current meter data, *J. Geophys. Res.*, 103:10377-10390.
- V. N. Eremeev, L. M. Ivanov, and A. D. Kirwan, Jr., 1992a. Reconstruction of oceanic flow characteristics from quasi-Lagrangian data: 1. Approach and mathematical-methods, *J. Geophys. Res.*, 97:9733-9742.
- V. N. Eremeev, L. M. Ivanov, and A. D. Kirwan, Jr., 1992b. Reconstruction of oceanic flow characteristics from quasi-Lagrangian data: 2. Characteristics of the large-scale circulation in the Black Sea, *J. Geophys. Res.*, 97:9743-9753.
- A. C. Poje and G. Haller, 1999. Geometry of cross-stream mixing in a double-gyre ocean model, *J. Phys. Oceanogr.*, 25:806-834.
- D. B. Rao and D. J. Schwab, 1981. A method of objective analysis for currents in a lake with applications to Lake Ontario, *J. Phys. Oceanogr.*, 11:739-750.

PUBLICATIONS

Toner, M., A. C. Poje, A. D. Kirwan, Jr., C. K. R. T. Jones, B. L. Lipphardt, and C. E. Grosch, Reconstructing basin-scale Eulerian velocity fields from simulated drifter data, *J. Phys. Oceanogr.*, submitted.